

FL958KWheel Loader Specifications

FL958K Dimensions



Item	Specifications
Rated Load	5500kg
Max. Traction Force	165kN
Max. Gradeability	30°
Max. Dump Clearance	3380mm
Dump Reach	1130mm
Wheel Tread	2150mm
Wheelbase	3320mm
Overall Dimension (L×W×H)	8850mm×2980mm×3420mm
Width Over Tyres	2750mm
Engine	
Emission Standard	Stage III
Number of Cylinder	6
Max. Torque	1150N·m
Rated Speed	2000rpm
Displacement	9.7L
Transmission System	
Torque Converter	1
Modulus of Converter	4±0.2
Transmission	Full-automatic shift planetary style
Gear Shift	2 forward, 1 reverse
Max. Speed	42km/h

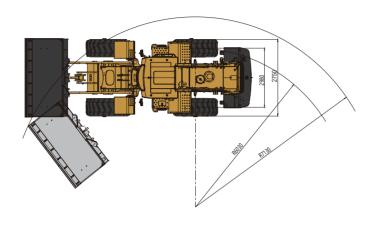

Tyre	
Tyre Size	23.5-25
Ply	Front 18, rear 16
Front Tyre Pressure	1
Rear Tyre Pressure	1

Steering System Flow amplification steering system Steering Angle Each Direction 37° Min. Turning Radius

Hydraulic System	
Working Pressure	1
Boom Lifting Time	/
Total Cycle Time	10.6s

Brake System Full hydraulic braking system

Service Refill Capacity	
Fuel Tank	320L
Hydraulic Tank	210L

LOVOL HEAVY INDUSTRY GROUP CO., LTD.

Front and Rear Axles

Axles Type


Address: No. 75, Huanghe East Road, Huangdao District, Qingdao City, Shandong Province, China. Alibaba: lovolconstruction.en.alibaba.com Facebook: Cons Lovol Website: en.wlovol.com

E-mail: lovol overseas@global.lovol.com TEL: +86-532-86907190

Dry

As manufacturer, LOVOL has right to constantly upgrade and improve our products without informing to customers. The pictures in literatures are for reference only, the detailed specifications are subject to real products.



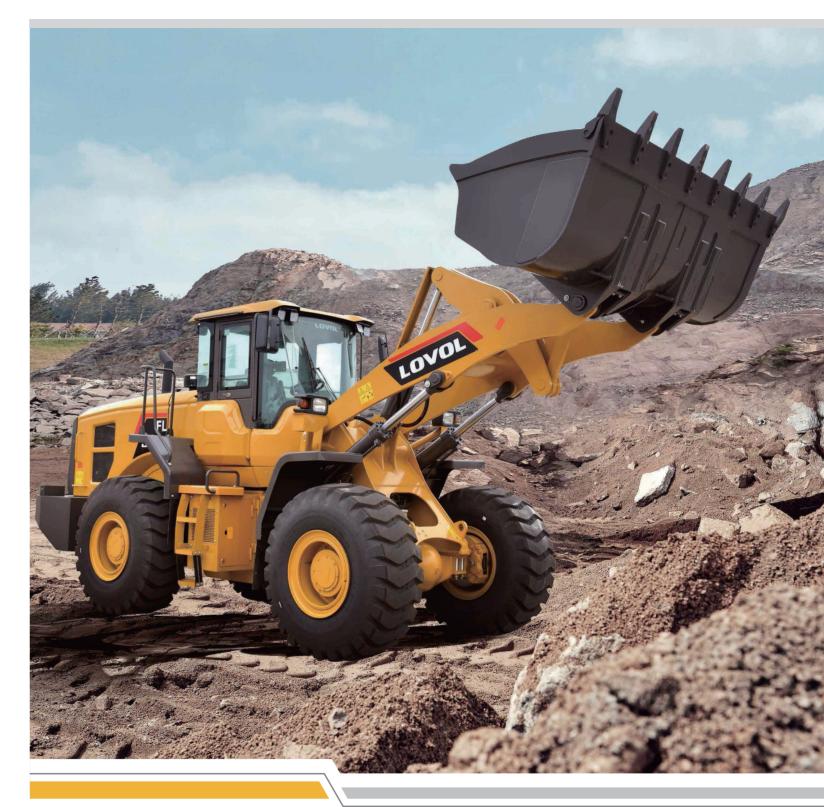

Engine Model Rated Power

Operating Weight Bucket Capacity

WEICHAI WP10G231E343 170KW 17910KG

3.3M³ Max. Breakout Force 175KN FL958K WHEEL LOADER