



Skid Steer Loader

FSL45
FSL60
FSL65

Product Features of FSL series:

- Compact structure, maneuverable movement suitable for narrow space operations;
- Full-wheeled driving is fit for hilly site work;
- Working devices diversity can realize instant replacement for different operation;



Imported hydraulic motor



Comfortable safety cab





Multiple working device

Products Information

Main parameters		FSL45	FSL60	FSL65
Rated load	kg	700	850	950
Tipping load	kg	1400	1700	1900
Bucket capacity	m ³	0.36-0.45	0.4-0.5	0.4-0.5
Work flow	L/min	62.5	75	75
Power	hp	50	60	65
Machine weight	kg	2750	3150	3150
Speed	km/h	12	12	12 (18)
Tire Size	/	10-16.5	12-16.5NHS	12-16.5NHS
Fuel/Oil,hydraulic oil capacity	L	50/50	60/60	80/80

Main dimensions		FSL45	FSL60	FSL65
Maximum operating height	mm	3670	3690	3690
Hinge pin height	mm	2900	2920	2920
Total Height	mm	2050	2080	2080
Length including bucket	mm	3380	3440	3440
Width including bucket	mm	1740	1820	1900
Track distance	mm	1450	1500	1500
Wheelbase	mm	991	991	1085
Ground clearance	mm	185	205	200
Flip angle	°	40	40	40
Flip height	mm	2310	2330	2330

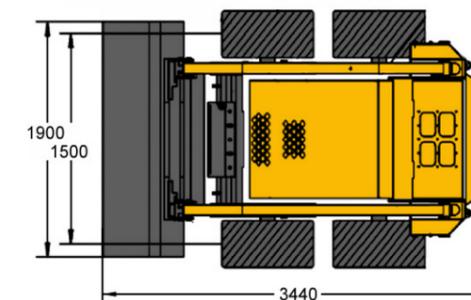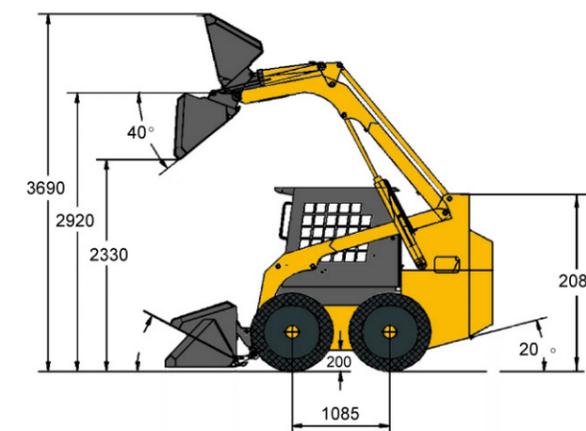

FSL65